



|                          |                            |
|--------------------------|----------------------------|
| Model No: ATC2K6-4840-MF | Version: V0                |
| Nominal Energy:          | Date released: 10-Dec-2019 |

# Specification

## **2.6KW OBC Fan System Model No.: ATC2K6-4840-MF**



## Revision History

| Date       | Revision | Changes detail | Updater |
|------------|----------|----------------|---------|
| 2019/11/10 | V0       | First Release  |         |
|            |          |                |         |
|            |          |                |         |
|            |          |                |         |
|            |          |                |         |
|            |          |                |         |
|            |          |                |         |




## 1、 Overview

The ATC2K6-4840-MF charger is the product designed to supplement electric energy for electric vehicle power battery according to the national standard of charger. The product not only has the advantages of high efficiency, small size, high stability, long life, etc., but also has the characteristics of high protection level, high reliability, complete protection function, etc. It is an ideal power source for electric vehicle charging. The charger has a built-in thermal sensing device with overheat protection (OTP) for automatic recovery. Fully sealed potting process in any complex environment without causing failures.

### Key features & Benefits

- \* Support UDS diagnosis
- \*Fully sealed process
- \*Built-in temperature sensor
- \*CAN Wake-up function
- \* Reliable operation at -40° C to +55° C
- \* Immediately shut down the output under hazardous operating conditions (internal 90°C)

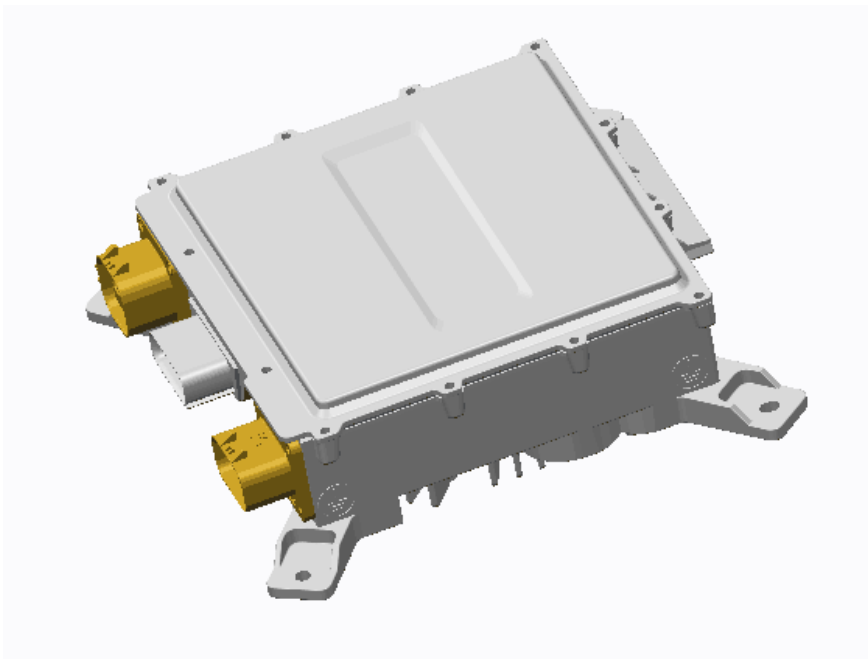

Outline map



## 2、Industry Glossary

| 序號<br>No. | 術語或縮寫<br>Term or abbreviation | 說明<br>Description                  |
|-----------|-------------------------------|------------------------------------|
| 1         | BMS                           | 電池管理系統 (Battery Management System) |
| 2         | CAN                           | CAN 通訊網路 (Controller Area Network) |
| 3         | EV                            | 純電動車 (Electric Vehicle)            |
| 4         | OBC                           | 車載充電機 (On Board Charger)           |
| 5         | CC                            | 恆流 (Constant Current)              |
| 6         | CV                            | 恆壓 (Constant Voltage)              |
| 7         | OVP                           | 過壓保護 (Over Voltage Protection)     |
| 8         | UVP                           | 欠壓保護 (Under Voltage Protection)    |
| 9         | OCP                           | 過流保護 (Over Current Protection)     |
| 10        | SCP                           | 短路保護 (Short Circuit Protection)    |
| 11        | OTP                           | 過溫保護 (Over Temperature Protection) |



### 3、Guideline

This technical requirement reference standard includes but is not limited to the following standards. The following standard documents, regardless of date, the latest version (including all amendments) apply to this technical requirement.

| 序號<br>No. | 標準編號<br>standard coding        | 標準名稱<br>standard name  | 備註<br>Notes |
|-----------|--------------------------------|--|-------------|
| 1         | ISO 16750-2012                 | Road vehicles - Environmental conditions and tests for electrical and electronic equipment                               |             |
| 2         | ISO 7637-2011                  | Road vehicles - electrical disturbances caused by conduction and coupling  |             |
| 3         | ISO 10605-2008<br>(GB/T 19951) | Road vehicles - test methods for electrical disturbances from electrostatic discharge                                    |             |
| 4         | ISO 11452<br>(GB/T 17619)      | Road vehicles - Test methods for electronic interference components of narrow-band radiated electromagnetic energy       |             |
| 5         | ISO 6722-1-2011                | Road vehicles -- Single-core cables -- Part 1 : Copper wire cables - Dimensions, test methods and requirements           |             |
| 6         | IEC 60664.1-2007               | Insulation of equipment in low-voltage systems - Part 1: Principles, requirements and tests                              |             |
| 7         | SAE J1742-2005                 | Test methods and general performance requirements for high-voltage electrical wiring connectors for vehicles on the road |             |
| 8         | GB/T 2408-2008                 | Determination of the burning properties of plastics and vertical method standards  |             |
| 9         | GB/T 2423                      | Environmental testing of electrical and electronic products  |             |
| 10        | QC/T 895-2011                  | Conductive car charger for electric vehicles   |             |
| 11        | GB/T 20234-2015                | Electric vehicle conduction charging connection device   |             |
| 12        | QC/T 413                       | Basic technical conditions for automotive electrical equipment   |             |
| 13        | QC/T 29106-2014                | Automotive low voltage wiring harness technical conditions   |             |



|    |                   |  |  |
|----|-------------------|--|--|
| 14 | GB/T 17626.5-2008 | Surge (impact) immunity test   |  |
| 15 | Q/FT B102-2005    | Vehicle product parts trace-ability labeling regulations   |  |
| 16 | GB/T 18384.3-2015 | Electric vehicles - Safety requirements - Part 3: Protection against electric shock                                    |  |
| 17 | EN 62477-1        | Power electronic converter systems and equipment: general safety requirements  |  |
| 18 | GB/T 4208-2008    | Shell protection rating (IP rating)  |  |
| 19 | GB/T 17619-1998   | Electromagnetic radiation immunity limits and measuring methods for motor vehicle electrical and electronic components |  |



## 4、 Technical Parameters

All specifications are typical at 25°C unless otherwise stated.

### 4.1 Output Specifications

| 型號(Model)      |                             | ATC2K6-4840-MF               |
|----------------|-----------------------------|------------------------------|
| Output Voltage | Output Voltage Range        | 35~70V                       |
|                | Output Current Range        | 0-40A                        |
|                | Output Power                | 2600W @220VAC /1600W @110VAC |
|                | Output Mode                 | 恆壓(CV)<br>恆流(CC)             |
|                | Voltage regulation accuracy | ±1%                          |
|                | Current regulation accuracy | ±2%                          |
|                | Ripple voltage coefficient  | ≤5%                          |

Remark: The verification of the above parameters requires code in normal mode (non-heating mode), and the electronic load is tested in CV mode.

### 4.2 Input Specifications

|                     |                             |                   |
|---------------------|-----------------------------|-------------------|
| Input Specification | Maximum Input Voltage Range | AC 90~265V        |
|                     | Nominal input voltage Range | AC 100~240V       |
|                     | Input frequency range       | 47-63Hz           |
|                     | Maximum input current       | ≤16A              |
|                     | Power factor                | > 0.98(100% load) |
|                     | Maximum power               | ≥93%(Full load)   |
|                     | Standby power consumption   | ≤5W               |

### 4.3 Low Voltage Output



|                    |                            |      |
|--------------------|----------------------------|------|
| Low voltage Output | Output way                 | CV   |
|                    | Output voltage             | 12V  |
|                    | Nominal current            | 5.5A |
|                    | CV accuracy                | ±2%  |
|                    | Output Power               | ≤66W |
|                    | Ripple voltage coefficient | ≤1%  |

#### 4.4 Protection Features

|                     |                              |   |
|---------------------|------------------------------|---|
| Protection Features | Input OVP                    | AC270±5V off output, automatic recovery after fault removal   |
|                     | Input UVP                    | AC85±5V off output, automatic recovery after fault removal  |
|                     | Output OVP                   | When the maximum output voltage exceeds +2%,turn off the output, automatic recovery after fault removal   |
|                     | Output UVP                   | The output voltage protection range is 33V ± 1V,when the product is down,,the power will turn off the output, automatic recovery after fault removal.   |
|                     | Output OCP                   | the maximum output current exceeds +5%,turn off the output, automatic recovery after fault removal  |
|                     | OTP                          | 85 °C derating power, 90 °C shutdown; automatic recovery after the temperature returns to normal  |
|                     | SCP                          | Before starting, if the output is short-circuited , not start ; during operating, if the output is short-circuited, the output is turned off immediately; the automatic recovery function after fault removal |
|                     | Reverse battery protection   | Yes, it will not cause damage to the charger or customer products   |
|                     | CAN communication protection | Automatically stop output when CAN communication fails  |

#### 4.5 Communication function

|  |                   |  |
|--|-------------------|--|
|  | CAN communication | The charger has CAN communication function for information exchange with the battery management system |
|--|-------------------|--|






|  |                      |                             |
|--|----------------------|-----------------------------|
|  | Baud rate            | 250Kbps or 500Kbps optional |
|  | Terminating resistor | NC                          |

#### 4.5 Safety and Others

|                     |                              |   |
|---------------------|------------------------------|---|
| Safety and Others   | Dielectric strength          | Input-Case:DC2121V 1min Leakage current $\leq 10\text{mA}$<br>Input-Output: DC4242V 1min Leakage current $\leq 10\text{mA}$<br>Output-case: DC2121V 1min Leakage current $\leq 10\text{mA}$     |
|                     | Insulation resistance        | Input-Case:DC1000V 1min Resistance value $>20\text{M}\Omega$<br>Input-Output:DC1000V 1min Resistance value $>20\text{M}\Omega$<br>Output-Case:DC1000V 1min Resistance value $>20\text{M}\Omega$ |
|                     | Grounding resistance         | The resistance between the input protection earth and the chassis ground point is less than 100 milliohms, and the test current is 25A AC.  |
|                     | EMI                          | Meet the requirements of GB/T 18487.3-2001 11.3.1   |
|                     | EMD                          | Meet the requirements of GB/T 18487.3-2001 11.3.2   |
|                     | Harmonic current             | Meet the requirements of 6.7.1.1 of GB 17625.1-2003   |
|                     | Inrush current               | $\leq 24\text{A}$   |
|                     | Output response time         | $\leq 5\text{S}$ , overshoot $\leq 5\%$   |
|                     | response time of turning off | 100% to 10% $\leq 50\text{mS}$ , 100% to 0% $\leq 200\text{mS}$   |
|                     | IP protection level          | IP67  |
|                     | Vibration                    | 10-25Hz amplitude 1.2mm, 25-500Hz 30m/s <sup>2</sup> , 8 hours in each direction  |
|                     | Noise                        | $\leq 65\text{dB}$ (A grade)  |
|                     | MTBF                         | 150000H(Vin=220Vac,Ta=25°C, 80%Load)  |
|                     | Operating environment        | Relative temperature 5%-95% without Frost, no condensation  |
|                     | Operating temperature        | -40°C ~ 55°C  |
| Storage temperature | -40°C ~ 105°C                |   |


#### 5、Function block diagram

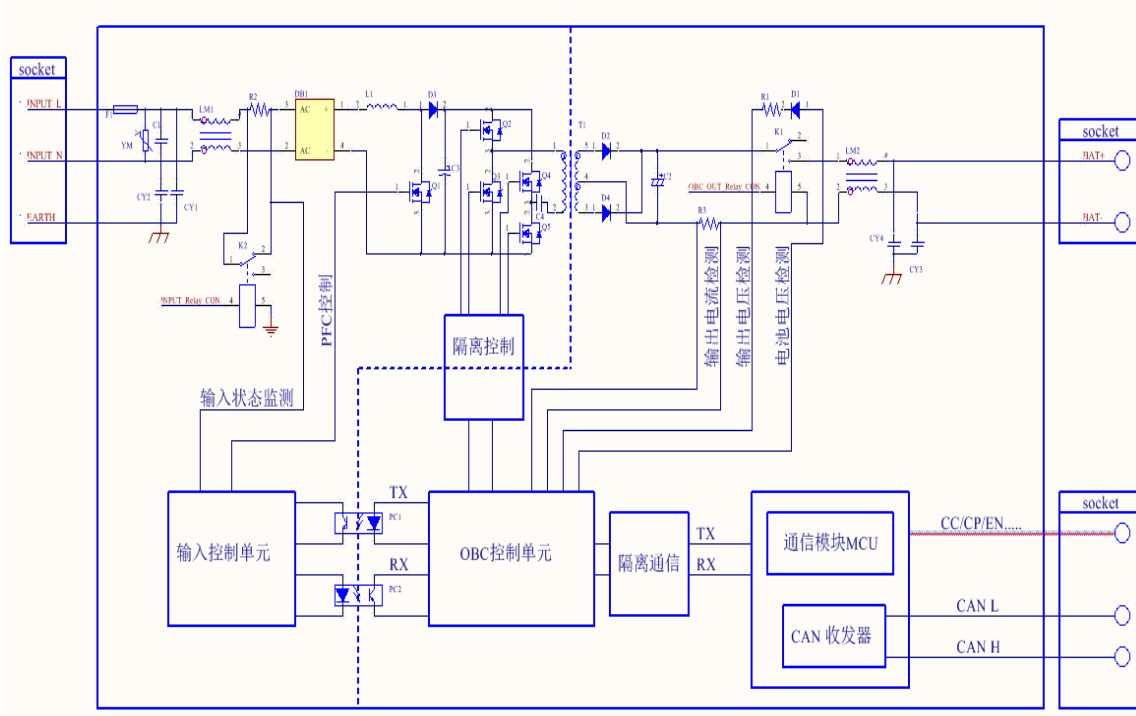

## 6、Electrical interface definition

### 6.1 AC input connector


HVSL633023A(Amphentol)




| Pin | Function        | Rated current | Definition | Wire cross-sectional area | Notes  |
|-----|-----------------|---------------|------------|---------------------------|--|
| 1   | Input AC N line | 16A           | 零線 (N)     | 2.5~4mm <sup>2</sup>      | Docking plug specification<br>Model:HVSL633063 |
| 2   | Input AC PE     |               | 地線 PE      |                           |  |
| 3   | Input AC L line |               | 火線 (L)     |                           |  |
| A   | /               | /             | /          | /                         |  |
| B   | /               | /             | /          | /                         |  |

### 6.2 High voltage output connector


HVSL362022A (Amphenol)




| Pin | Function        | Rated Current | Definition | Wire cross-sectional area | Notes   |
|-----|-----------------|---------------|------------|---------------------------|---|
| 1   | Positive output | 40A           | /          | 6mm <sup>2</sup>          | Docking plug specification<br>Model: HVSL362062                                     |
| 2   | Negative output |               | /          |                           |   |
| A   | /               | /             | /          | /                         |   |
| B   | /               |               | /          |                           |  |

### 6.3 Low voltage signal connector

348302001 (Molex)



| Pin    | Function | Rated Current | signal type                     | Notes  |
|--------|----------|---------------|---------------------------------|--|
| 10     | 12V5A    | /             | 12V5A                           | Docking plug specification<br>Model: 334722006 |
| 11     | CAN_H    | 0.1A          | CAN signal high, digital signal |  |
| 12     | CAN_L    | 0.1A          | CAN signal low, digital signal  |  |
| 17     | GND      | /             | Signal ground                   |  |
| Others | /        | NC            | Blank pin                       |  |



## 7、 Software requirements



## 7.1、CAN communication

| No. | Items                          | Technical indicators              | Notes |
|-----|--------------------------------|-----------------------------------|-------|
| 1   | Baud rate                      | 250 Kbit/s or 500 Kbit/s optional | /     |
| 2   | CAN bus communication protocol | Comply with CAN2.0B specification | /     |
| 3   | Terminating resistor           | No terminating resistor           | /     |

## 8、Mechanical requirements

### 8.1: Size requirements

Length × Width × Height : 264.5mm × 252mm × 100mm, tolerance ± 3mm

### 8.2 Appearance requirements

The surface of the part should be smooth, free from defects such as delamination, rust, cracks, spots, burrs, deformation, and hand-accessible bumps. The connecting parts are complete, the parts are securely fastened, and there are no defects and damages such as rust, burrs and cracks. The connector sheath and pins should be intact and free of damage, and the components must be fastened.

### 8.3 Weight requirements



Machine weight ≤ 5kg

## 9、Nameplate and traceability mark

### 9.1 Nameplate bar code


The basic parameters of the nameplate include: model, rated voltage, rated power, production date, serial number, etc.

The following format is for reference


|  |  |   |                               |
|--|--|---|-------------------------------|
|  <b>安仁國際股份有限公司</b><br>ANNREN TECHNOLOGIES CO., LTD. |  | <b>DC/DC</b><br> |                               |
| Part Name  | 2.6kw on board charger   |   |                               |
| Model No.  | at-hk-mf-48-40   |   |                               |
| Part No.   |  |   |                               |
| S/N  | Please fill in the production serial number(QR code scans the same number) |   |                               |
| Input Voltage  | 100-240V   | Output Voltage  | 35-70V                        |
| Output Current   | 40A  | Output Power  | 2.6KW                         |
| HW Version:  | Please fill in the HW version  | SW Version:   | Please fill in the HW version |



### 10. Installation Size

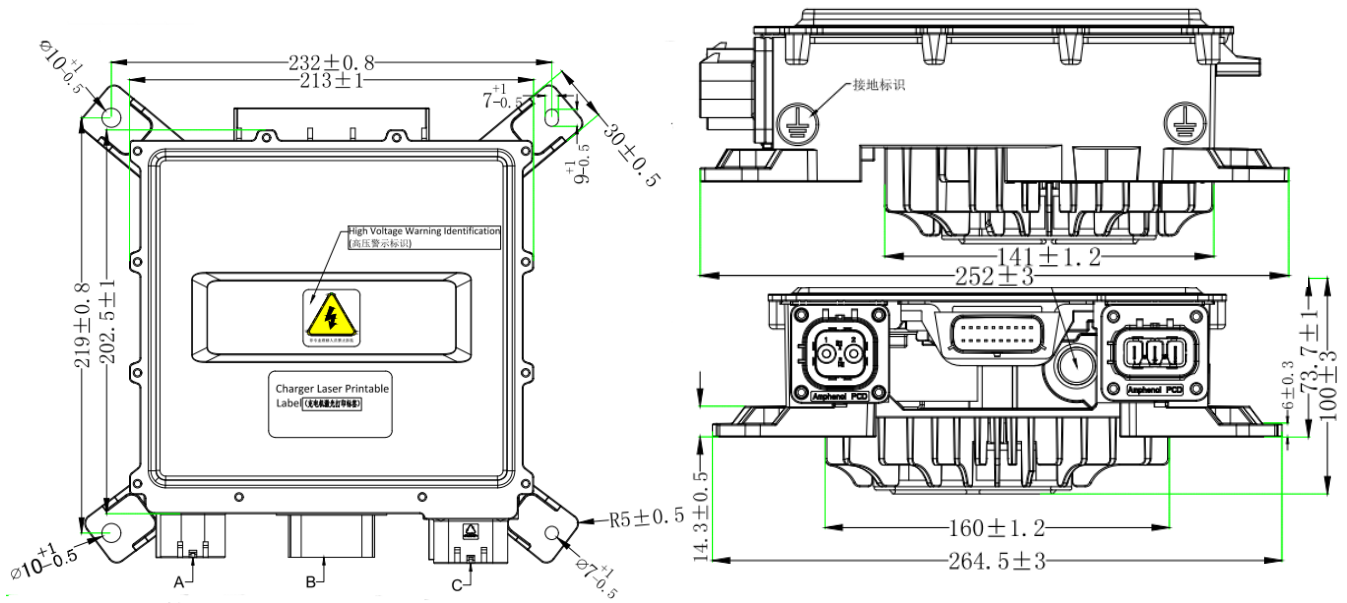


### 11. Installation requirements

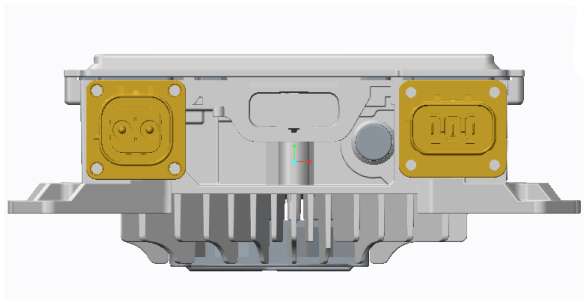


Best way to install

( At least 50mm distance off to any obstacle)

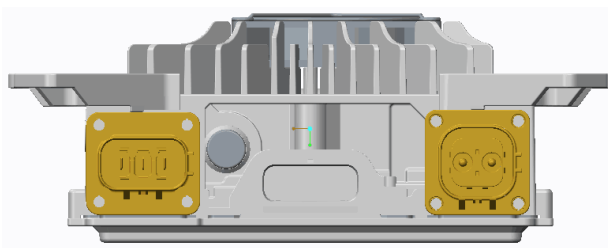

Forbidden way to install

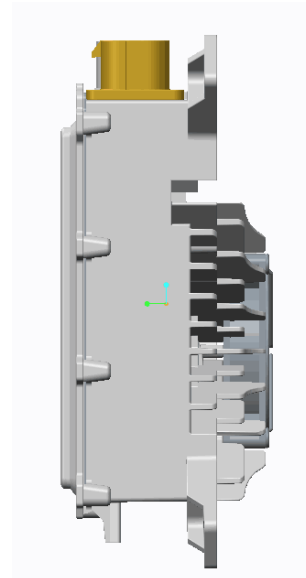

Acceptable way to install