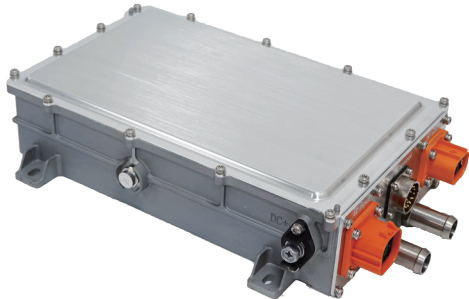




Combo 6.6KW OBC+2.2KW DC/DC Converter  
 Model No. ATD2K2C6K6B-D14C750-W



**Features**

- 1 Output Power:  
 OBC: 6.6KW  
 DC/DC: 2.2KW
- 2 Input Voltage:  
 OBC: 85~265VAC  
 DC/DC: 500~850VDC
- 3 Output Voltage:  
 OBC: 500~850VDC  
 DC/DC: 9~16VDC
- 4 Dimensions: 326x211x83mm
- 5 Weight: ≤9KG
- 6 Cooling System: Liquid, flow rate ≥8L/min
- 7 Protection Level: IP67
- 8 Communication Method: CAN-BUS
- 9 Enclosure: Aluminum alloy
- 10 Software: Digital software design

**Specification**

Description	Technical Specification	Remark
<b>OBC Charging Mode</b>		
Rated Output Power	6.6KW	
Input Voltage Range	85~265VAC	
Input Current	32A Max	
Power Factor	≥0.99(@220VAC full load)	
Output Voltage Range	500~850VDC	
Max Output Current	10A	Adjustable
Efficiency	≥94%	
Voltage Accuracy	±1%	Rated voltage & specific load
Current Accuracy	±1%	
<b>DC/DC Mode</b>		
Input Voltage Range	500~850VDC	
Output Current	<10A(@240VDC full load)	
Efficiency	≥94%	
Output Voltage Range	9~16VDC	
Rated Output Voltage	14VDC	
Rated Output Current	158A	
Rated Power	2.2KW	
Peak Power	2.5KW	
Voltage Ripple	300mV Max	



Combo 6.6KW OBC+2.2KW DC/DC Converter  
 Model No. ATD2K2C6K6B-D14C750-W

Description	Technical Specification	Remark
Others		
Operating Temperature	-40-85°C	Coolant inlet temperature
Low Voltage Wakeup	12VDC&200mA max (Wakeup signal)	Wakeup BMS/VCU
Wakeup Method	CAN、DC、PP/CP	Support reservation charging
CAN Communication	CAN-BUS	
Quiescent Current	≤1mA	Battery current will be consumed in sleep/standby mode
Protection	Input OVP, UVP, output OVP, UVP, OTP, OCP, output short circuit protection, communication fault protection	
EMC	GB/T18387-2008, EN 55022	

**Structural Parameters ( unit : mm)**

&,QSW

6LQDOFRQWURO

&,QSW

/RZYROWDHRXWSXW

Coolant inlet







## Combo 6.6KW OBC+2.2KW DC/DC Converter Model No. ATD2K2C6K6B-D14C750-W

### Connector Model

Position	Function	Brand	Socket Model	Plug Model
1	Signal control	TE	2334366-2	2137299-8
2	AC Input	Amphenol	HVSL364024A	HVSL364064A106I
3	DC Output	Amphenol	HVC2P63MV406	HVC2P63FS406
4	Low voltage output	Gvtong	GH01-F200-1NNB-T21	M8 Copper

### Interface Definition

AC Input(2)		DC Output(3)		Low Voltage Output(4)			
							
1	L	1	Output +	+	LV Output +		
2	NC	2	Output -				
3	NC	A	HVIL_IN				
4	Neutral	B	HVIL_OUT				
A	HVIL_IN						
B	HVIL_OUT						
	Ground to chassis						
Signal Control(1)							
							
1A	CAN1-H	2A	Wakeup	3A	NTC1+	4A	HVIL_IN
1B	CAN1-L	2B	PP_OUT (Low resistance)	3B	NTC2+	4B	HVIL_OUT
1C	EN_OBC	2C	EN_Inverter	3C	NC	4C	CAN2-H(Reserved)
1D	EN_DC	2D	NC	3D	NTC-	4D	CAN2-L(Reserved)
1E	PP	2E	NC	3E	Lock FB1	4E	NC
1F	CP	2F	NC	3F	Lock FB2	4F	NC
1G	VCC+	2G	NC	3G	Lock+	4G	NC
1H	GND	2H	NC	3H	Lock-	4H	NC