

12/18POS Plastic Shell Signal Connector

Describe

- Straight-in lock
- multiple keys and colors
- High Protection Degree: IP68
- Adopt punching terminal, low cost,
- convenient for customer wiring
- For battery pack, MCU、PDU
- equipment



Application

- Current Rating: 7A
- Voltage Rating: 300V DC
- Shield: N
- HVIL: Non
- Temperature: -40°C-- +125°C

Naming Rules

Plug

RS4 -K 18 TY -DW -B

Design Extension Number : B

DW:D key gray; AH: A black;

BO: B key orange;

Press plug

POS: 12/18

Plug contact

Socket

Rs4 -J 12 ZY -AH -B

Design Extension Number : B

DW:D key gray; AH:A black;

BO:B key orange;


Press plug

POS: 12/18

Plug contact

SIZE

PLUG

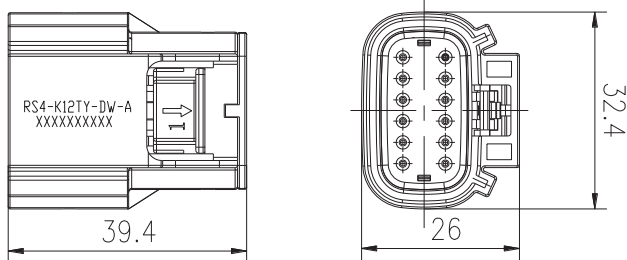

SOCKET

