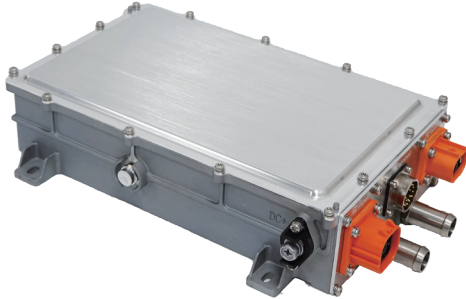




Combo 2KW DC/DC Converter 6.6KW OBC Bidirectional
 Model No. ATD2KCB6K6-D14C380-W



Features

- 1 Output Power:
OBC: 6.6KW
DC/DC: 2KW
- 2 Input Voltage:
OBC: 85~265VAC
DC/DC: 250~450VDC
- 3 Output Voltage:
OBC: 250~450VDC
DC/DC: 9~16VDC
- 4 Dimensions: 326x211x83mm
- 5 Weight: ≤9KG
- 6 Cooling System: Liquid, flow rate ≥8L/min
- 7 Protection Level: IP67
- 8 Communication Method: CAN-BUS
- 9 Enclosure: Aluminum alloy
- 10 Software: Digital software design

Specification

Description	Technical Specification	Remark
OBC Charging Mode		
Rated Output Power	6.6KW	
Input Voltage Range	85~265VAC	
Input Current	32A Max	
Power Factor	≥0.99(@220VAC full load)	
Output Voltage Range	250~450VDC	
Max Output Current	20A	Adjustable
Efficiency	≥94%	
Voltage Accuracy	±1%	Rated voltage, specific load
Current Accuracy	±1%	
Inverter Mode		
Input Voltage Range	250~450VDC	
Output Voltage	220Vac(±5%)/50Hz	
Power	6KVA	
Efficiency	≥94%	
Output Harmonic Distortion (THDv)	<3%(linear load)	
Dynamic Response	60ms(linear load)	
Leakage Current Protection Threshold	≤30mA	



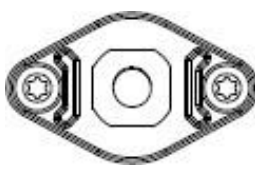
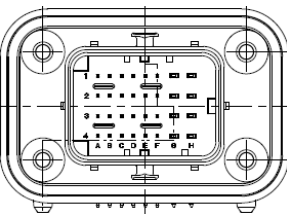


Combo 2KW DC/DC Converter 6.6KW OBC Bidirectional Model No. ATD2KCB6K6-D14C380-W

Connector Model

Position	Function	Brand	Socket Model	Plug Model
1	Signal control	TE	2334366-2	2137299-8
2	AC Input	Amphenol	HVSL364024A	HVSL364064A106I
3	DC Output	Amphenol	HVC2P63MV406	HVC2P63FS406
4	Low voltage output	Gvtong	GH01-F200-1NNB-T21	M8 Copper

Interface Definition

AC Input(2)		DC Output(3)		Low Voltage Output(4)			
							
1	L	1	Output +	+	LV Output +		
2	NC	2	Output -				
3	NC	A	HVIL_IN				
4	Neutral	B	HVIL_OUT				
A	HVIL_IN						
B	HVIL_OUT						
	Ground to chassis						
Signal Control(1)							
							
1A	CAN 1-H	2A	Wakeup	3A	NTC 1 +	4A	HVIL_IN
1B	CAN 1-L	2B	PP_OUT (low resistance)	3B	NTC 2 +	4B	HVIL_OUT
1C	EN_OBC	2C	EN_Inverter	3C	NC	4C	CAN 2-H(reserved)
1D	EN_DC	2D	NC	3D	NTC 1 & 2 -	4D	CAN 2-L(reserved)
1E	PP	2E	NC	3E	Lock feedback 1	4E	NC
1F	CP	2F	NC	3F	Lock feedback 2	4F	NC
1G	VCC +	2G	NC	3G	Lock +	4G	NC
1H	GND	2H	NC	3H	Lock -	4H	NC