


12PIN Swap connector

Description

- 12 PIN Signal+(DC+)+(DC-)+PE
- Shell material: Die-cast aluminum alloy
- Anti-mistouch design (IPXXB)
- High Protection Degree: IP67
- Cable Range(DC Terminal):50mm²/70mm²
- Rated current: 200A (For 50mm² Cables)
300A (For 70mm² Cables)
- Rated Voltage: 1000V DC
- Temperature Range: -40°C~ +125°C
- HVIL&Shielding function integrated
- ±5mm floating in XY direction and -10mm floating in Z direction can be achieved in vehicle end

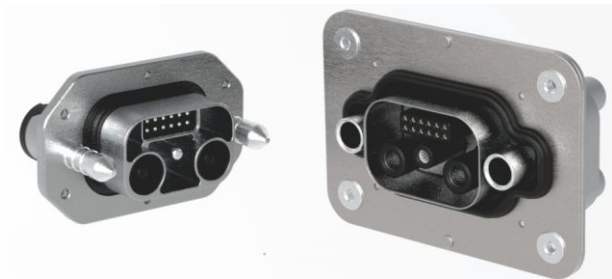

Ordering Information

PFSC-JXA-BS1270

High Voltage applicable cable squares

Number of low voltage PIN

S: Jack; P: Pin


B: Vehicle end; C: Battery end

Extended Code

Power Fast-Swap Connector

Dimensions

Battery End

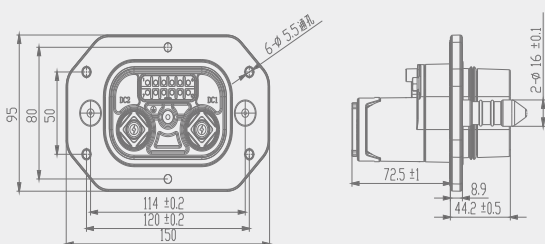

Car End

