



Combo 2KW DCDC Converter 6.6KW OBC Bidirectional Model No. ATD2KCB6K6B-D14C750-W



Features

- 1 Output Power:
OBC: 6.6KW
DC/DC: 2KW
- 2 Input Voltage:
OBC: 85~265VAC
DC/DC: 500~850VDC
- 3 Output Voltage:
OBC: 500~850VDC
DC/DC: 9~16VDC
- 4 Dimensions: 326x211x83mm
- 5 Weight: ≤9KG
- 6 Cooling System: L liquid, flow rate ≥8L/min
- 7 Protection Level: IP67
- 8 Enclosure: Aluminum alloy
- 9 Software: Digital software design
- 10 Inverter Function: Supported
- 11 Online Upgrade & Fault Diagnosis: Supported

Specification

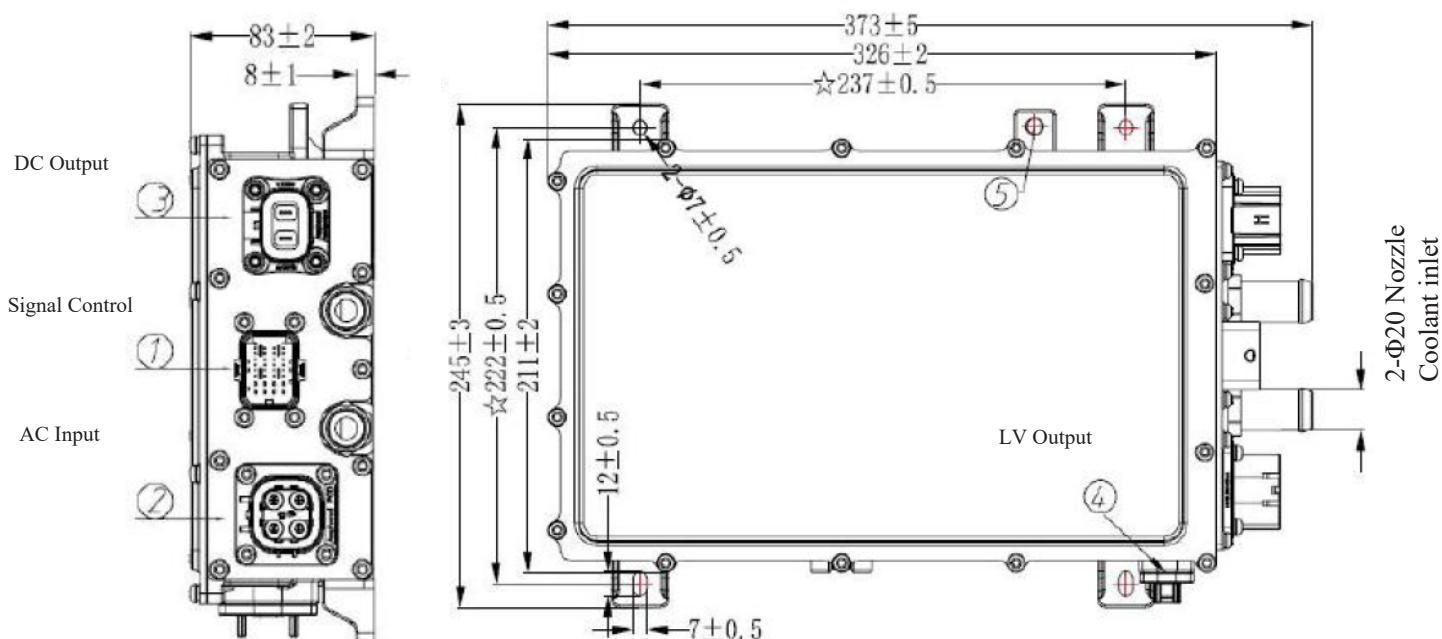
Description	Technical Specification	Remark
OBC Charging Mode		
Rated Output Power	6.6KW	
Input Voltage Range	85~265VAC	
Input Current	32A Max	
Power Factor	≥0.99(@220VAC full load)	
Output Voltage Range	500~850VDC	Adjustable
Max Output Current	10A	
Efficiency	≥94%	Rated voltage
Voltage Accuracy	±1%	
Current Accuracy	±1%	
Inverter Mode		
Input Voltage Range	500~850VDC	
Output Voltage	220VAC(±5%)/50Hz	
Power	6V	
Efficiency	≥94%	
Output Harmonic Distortion (THDv)	<3%(linear load)	
Dynamic Response	60ms(linear load)	
Leakage Current Protection Threshold	≤30mA	



Combo 2KW DCDC Converter 6.6KW OBC Bidirectional
Model No. ATD2KCB6K6B-D14C750-W

Description	Technical Specification	Remark
DC/DC Mode		
Input Voltage Range	500~850VDC	
Input Current Range	<16A	
Efficiency	≥94%	
Output Voltage Range	9~16V	
Rated Output Voltage	14V	
Rated Output Current	145A	
Rated Power	2KW	
Peak Power	2.4KW	
Voltage Ripple	300mV Max	
Others		
Operating Temperature	-40~85°C	Coolant inlet temperature
Low Voltage Wakeup	12VDC&200mA max (Wakeup signal)	Wakeup BMS/VCU
Wakeup Method	CAN, AC, DC, PP/CP, EN(Hardwire)	Support reservation charging
CAN Communication	CAN-BUS	
Quiescent Current	≤1mA	Battery current will be consumed in sleep/standby mode
Protection	Input OVP, UVP, output OVP, UVP, OTP, OCP, output short circuit prote- ction, communication fault protection	
EMC	GB/T18387-2008, EN 55022	

Structural Parameters (unit : mm)









Combo 2KW DCDC Converter 6.6KW OBC Bidirectional Model No. ATD2KCB6K6B-D14C750-W

Connector Model

Position	Function	Brand	Socket Model	Plug Model
1	Signal control	TE	2334366-2	2137299-8
2	AC Input	Amphenol	HVSL364024A	HVSL364064A106I
3	DC Output	Amphenol	HVC2P63MV406	HVC2P63FS406
4	Low voltage output	Gvtong	GH01-F200-1NNB-T21	M8 Copper

Interface Definition

AC Input(2)		DC Output(3)		Low Voltage Output(4)	
					
1	Hotline	1	Output +	+	LV Output +
2	NC	2	Output -		
3	NC	A	HVIL_IN		
4	Neutral	B	HVIL_OUT		
A	HVIL_IN				
B	HVIL_OUT				
	Ground to chassis				
Signal Control(1)					
					
1A	CAN 1-H	2A	Wakeup	3A	NTC1 +
1B	CAN 1-L	2B	PP_OUT (low resistance)	3B	NTC2 +
1C	EN_OBC	2C	EN_Inverter	3C	NC
1D	EN_DC	2D	NC	3D	NTC -
1E	PP	2E	NC	3E	Lock feedback 1
1F	CP	2F	NC	3F	Lock feedback 2
1G	VCC +	2G	NC	3G	Lock +
1H	GND	2H	NC	3H	Lock -
4A	HVIL_IN	4B	HVIL_OUT	4C	CAN 2-H(reserved)
				4D	CAN 2-L(reserved)
				4E	NC
				4F	NC
				4G	NC
				4H	NC