



3KW DC/DC Converter-Module Model No. ATD3KB-380S27-M



Features

- 1 Output Power: 3KW
- 2 Input Voltage: 200~450VDC
- 3 Output Voltage: 27.5VDC
- 4 Dimensions: 202x123x54mm
- 5 Weight: $\leq 1.8\text{KG}$
- 6 Cooling Method: Heat sink attached for external cooling system
- 7 Communication Method: CAN BUS
- 8 Enclosure: N/A
- 9 Software: Digital software design


Specification

Description	Technical Specification	Remark
Operating Temperature	-40~85°C	Bottom plate temperature
Rated Output Power	3KW	Peak power: 3.6KW
Input Voltage Range	200~450VDC	
Rated Output Voltage	27.5VDC	Adjustable
Rated Output Current	110A	
Auxiliary Voltage Range	9~32VDC	VCC
Efficiency	$\geq 95\%$	Rated voltage, specific load
Output Voltage Ripple	$\leq 500\text{mV}_{\text{PK-PK}}$	
Output Voltage Accuracy	$\pm 1\%$	
Wakeup Method	CAN, hard wire (EN)	
Communication Method	CAN-BUS	
Quiescent Current	$\leq 2\text{mA}$	Battery current consumed in sleep/standby mode
Protection Characteristics	Input OVP/UVP, output OVP/UVP, input anti-reverse protection, output short circuit protection, OCP, OTP	
EMC	GB/T 18655-2010	Achieve class 3, with specific EMI filter and enclosure
Installation instructions	Need apply specific thermal grease (contact AT for details).	



3KW DC/DC Converter-Module Model No. ATD3KB-380S27-M


Structural Parameters (unit : mm)

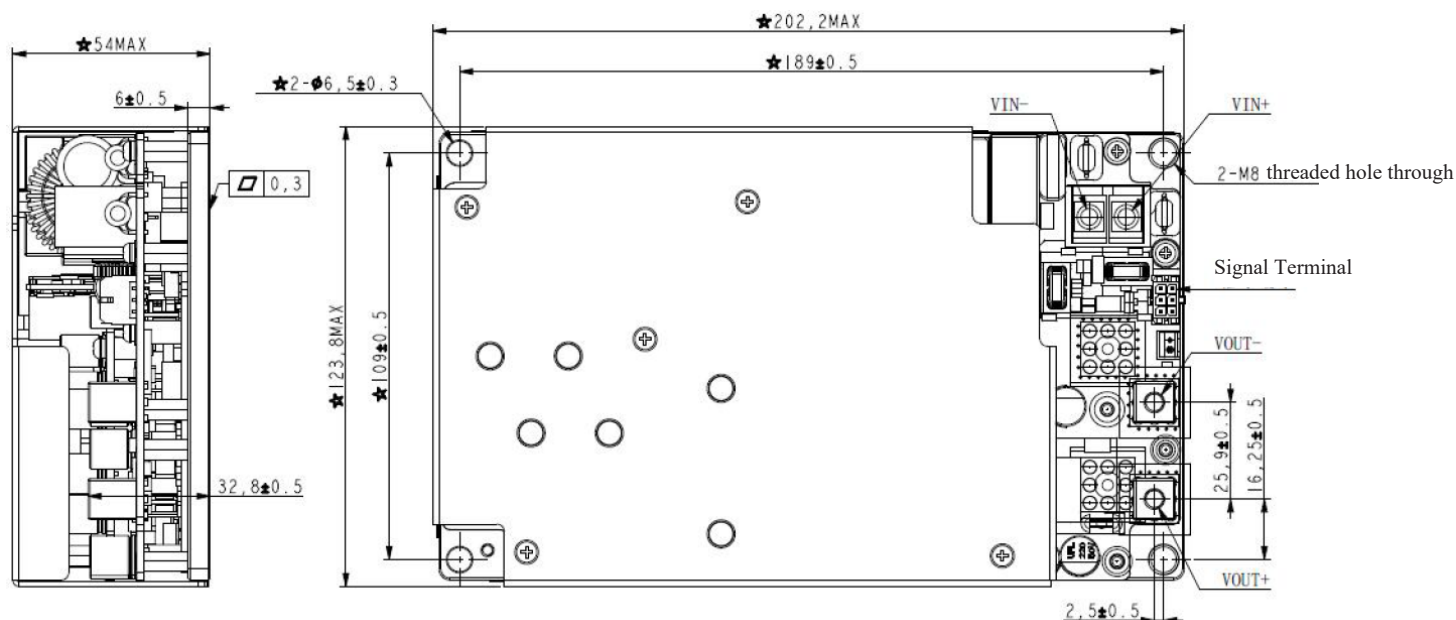

Connector Model

Function	Brand	Socket Model	Plug Model
Signal terminal	MOLEX	43045-0612	43025-0600
Input	/	M4 Terminal Block	M4 Screw
Output	/	M5 Copper pillar	M5 Screw

Interface Definition

Brand	Model	Description		Remark
MOLEX	43045-0612	PIN1	VCC +	
		PIN2	EN	
		PIN3	GND	
		PIN4	CAN-GND	
		PIN5	CAN-H	
		PIN6	CAN-L	
/	M4 Binding post	Input +	IN +	2.5mm ² wire recommended
		Input -	IN -	
/	M5 Copper pillar	Output +	OUT +	2.5mm ² wire recommended
		Output -	OUT -	