


4POS High Voltage Plastic Shell Connector With Shield(REN1)

Describe

- 2POS
- Plastic shell
- With secondary locking, delayed unlocking
- Anti-mis-touch design(IPXXB)
- High protection Degree: IP6K9K、IP684
- Anti-mistake key positions
- Cable Section: 16mm²--25mm²
- Integrated Mask Interlocking Function For battery heating, OBC、PDU equipment

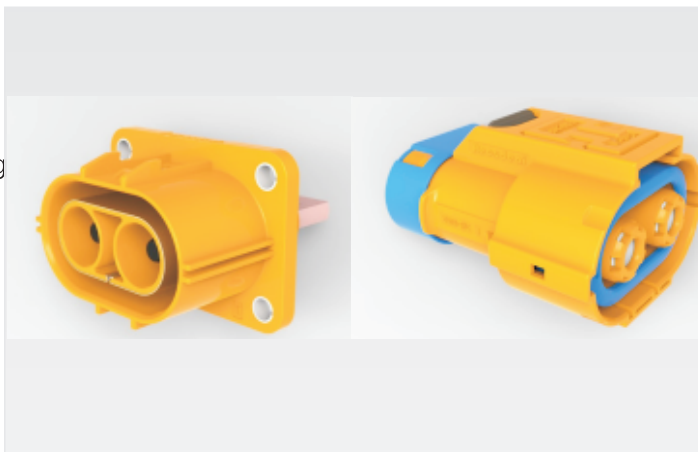


Application


- Current Rating: 80A=16mm²
125A=25mm²
- Voltage Rating: 1000V DC
- Shield: Option
- HVIL: Option
- Temperature range: -40°C--+140°C

Ordering information

PLUG

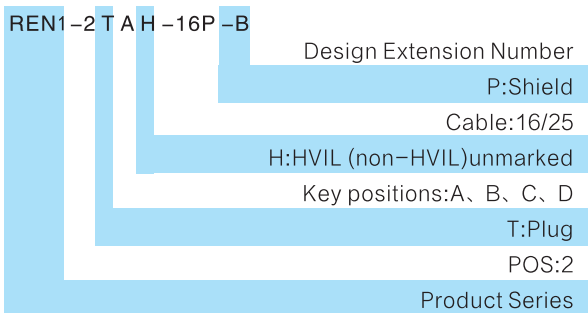


SOCKET

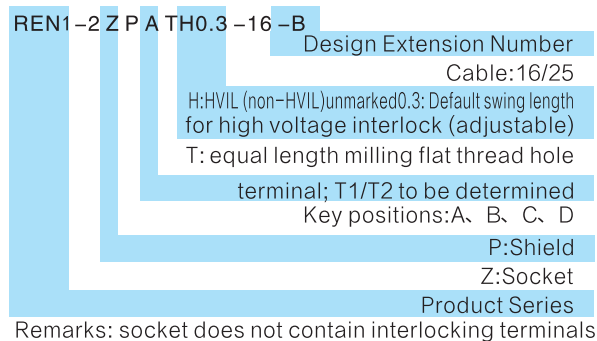


Size


PLUG

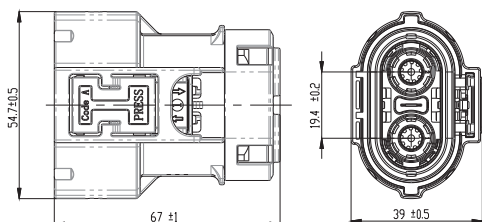

Socket(Suitable for equal length milling flat threaded hole)

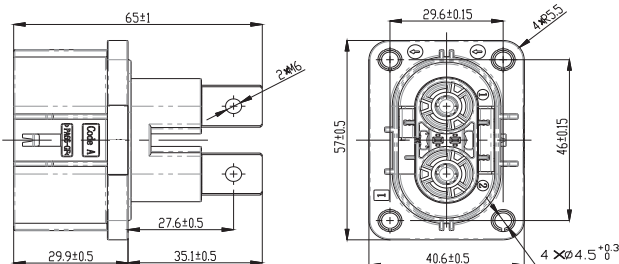

Socket install hole size

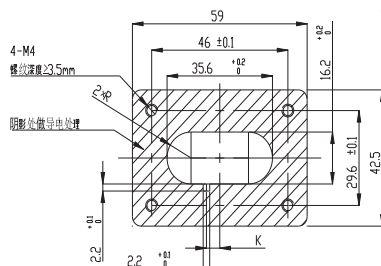

键位	尺寸 K	备注
A	4.5	
B	9	