
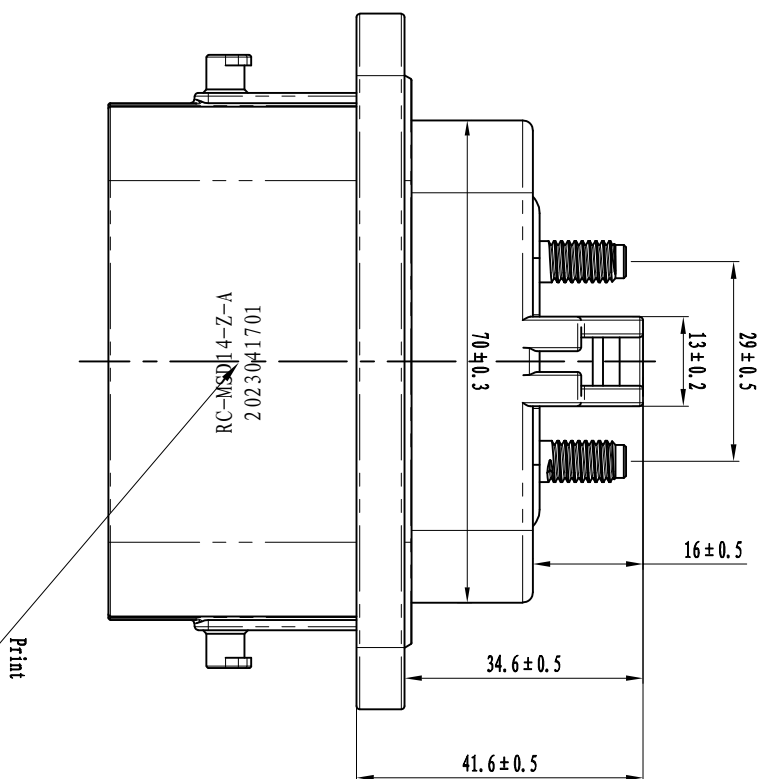
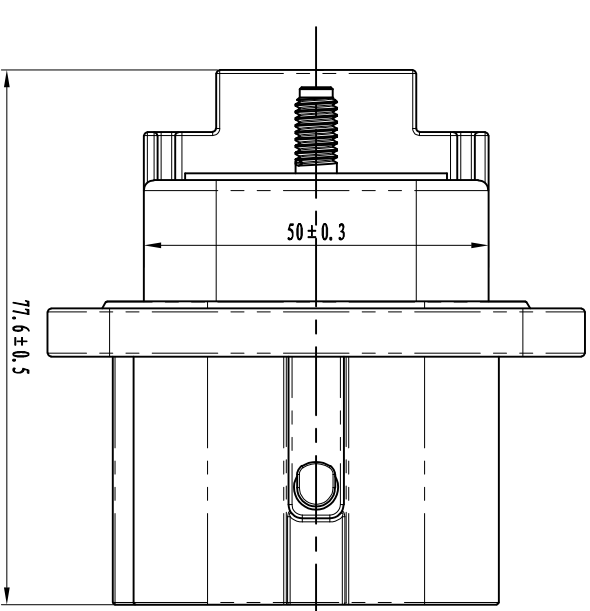


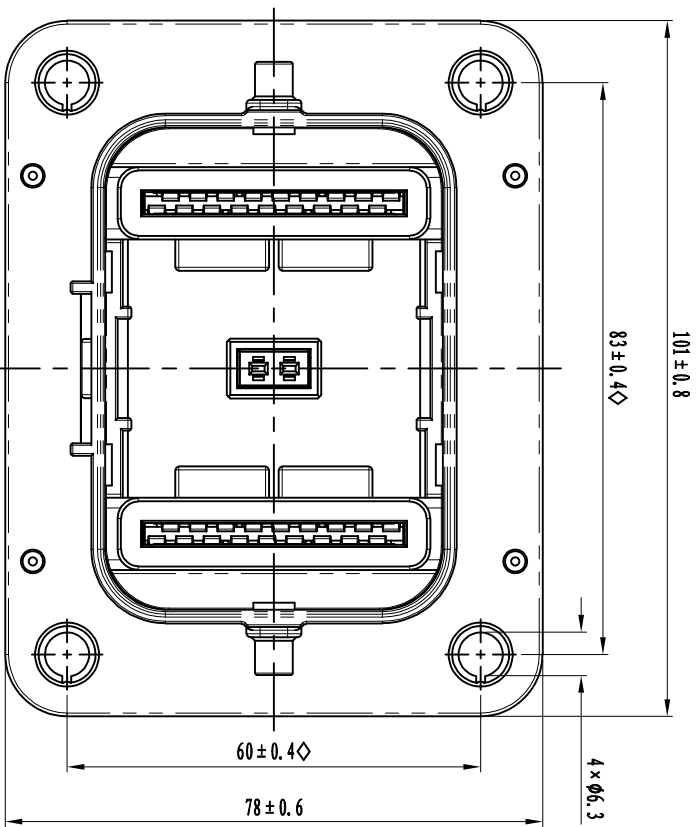

Technical requirements:

1. Operating temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$;

2. Ingress protection: The mating state is satisfied IP68, IP69K;

▼ 3. Withstand voltage: 3000V. DC 60s , leakage current $< 1\text{mA}$ (under normal conditions except fuses) ;

▼ 4. Insulation resistance: There is no fuse 5000M Ω 1500V DC 60s (normal) ;

5. Mechanical life: ≥ 100 frequency, It does not affect MSD performance;

▼ 6. The material meets the environmental protection requirements of RoHS2.0 and is flame retardant UL94-V0;

7. The product operation instructions should be read carefully before use;

8. The plug needs to be interchangeable with the socket in the same key position before it is considered qualified.

序号	型号	料号	备注
1	RC-MSD14-Z-A	3. 663. 191143. 02R	No interlocking, with dust cover

材料		RecoDeaI Innovation technology					
		设计	日期	名称	MSD14 connector receptacle	图号	R3. 663. 191143
		工艺	日期	视图		总装型号	RC-MSD14
		审核	日期	比例	2:1	面积	mm ²
		标准化	日期	单位	mm	重量	g
批准		日期				页数	1/1