



32 POS Plastic Shell Signal Connector

Describe

- Hand locking structure
 - 3 key positions,
 - High Protection: IP68
 - Adopt punching terminal, low cost,
 - convenient for customer wiring
- For battery pack, MCU、PDU equipment



Application


- Current Rating: Big Terminal 7A, Small 5A
- Voltage Rating: 300V DC
- Shield: Non
- HVIL: Non
- Temperature: -40°C ~ +125°C

Name of Material

No	Product Name	Product Model	Product Chart	Product Chart	Note
1	32POS Plastic shell plug	RC-EV-TS32A-B-TW	R3.653.605002	Free Plug	No contact, dust cover
2	32POS Plastic shell plug	RC-EV-TS32B-B-TW	R3.653.605003	Free Plug	No contact, dust cover
3	32POS Plastic shell plug	RC-EV-TS32C-B-TW	R3.653.605004	Free Plug	No contact, dust cover
4	32POS Plastic shell plug	RC-EV-ZP32A-B-TW	R3.663.605003	Rectangular flange	No Pin, dust cover
5	32POS Plastic shell plug	RC-EV-ZP32B-B-TW	R3.663.605004	Rectangular flange	No Pin, dust cover
6	32POS Plastic shell plug	RC-EV-ZP32C-B-TW	R3.663.605005	Rectangular flange	No Pin, dust cover

SIZE

Socket RC-EV-ZP32-B-TW

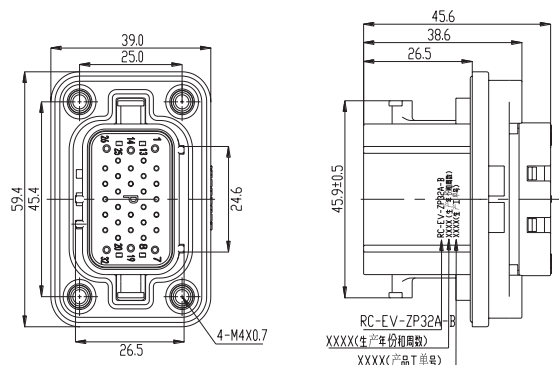

PLUG RC-EV-TS32-B-TW

