



2/3 POS High voltage plastic shell connector with shield(RED)

Describe

- 2/3 POS
- Plastic shell
- Locking handle
- Secondary locking structure
- High protection degree
- IP6K9K、IP68
- 6 anti-misplug key position.
- Cable section: 2.5mm² — 4mm²



Application

- Current Rating: 22A=2.5mm²
25A=3mm²
30A=4mm²
- Voltage Rating: 1000V DC
- Shielding: Option
- HVIL: Option
- Working Temperature:
-40°C ~ +140°C

Ordering information

RED-TM2PAH-2.5-A-TW

Extensive character

Cable section: 2.5、3、4(mm)

H: H: HVIL(Non-HVIL unmarked)

Anti-misplug key position: A、B、D、E、

P: Shielding

Power contact number: 2、3


T: Plug; ; Z: Flange installation socket

Product Series

Note: connector type plug generated according to naming rules does not contain power terminal, socket does not contain power & interlocking terminal. Three-core connectors do not have high-voltage interlocking, three-core connector plug can not adapt to 3 mm² and 4 mm² shielded wire.


Size

2 POS Plug

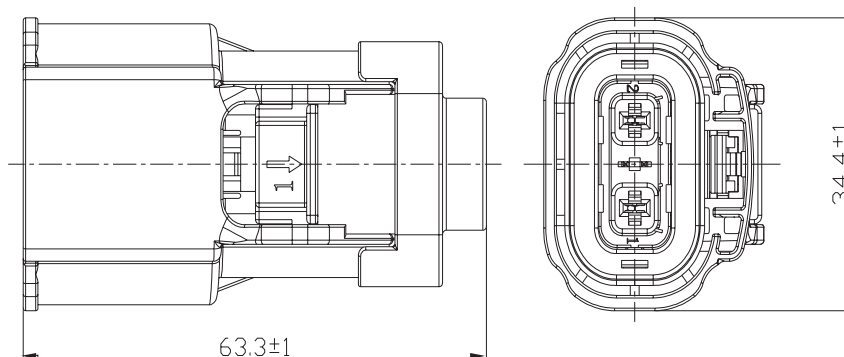




2 POS Flange installation socket

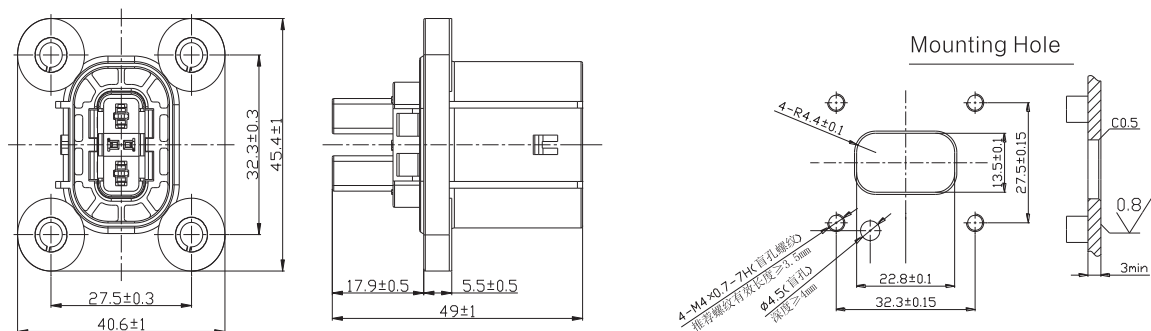

3 POS Plug

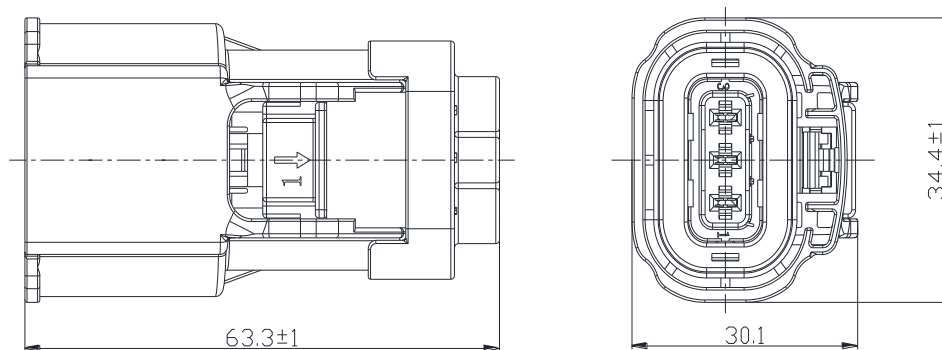

3 POS Flange installation socket

